BOLLO CLASSIC/STRONG

Premium Contract Rubber Flooring

Nov. 2025

BOLLO CLASSIC/STRONG

Studded suface in a solid color.

	THICKNESS	WEIGHT	TILES
CLASSIC	0.106 in (2.7mm)	~0.76 lbs/ft² (~3.7 kg/m²)	19 11/16 in x 19 11/16 in (50 cm x 50 cm)
STRONG* **Colors with *S*	0.157 in (4mm)	~1.10 lbs/ft² (~5.4 kg/m²)	39 3/8 in x 39 3/8 in (100 cm x 100 cm)

STUD DIMENSIONS



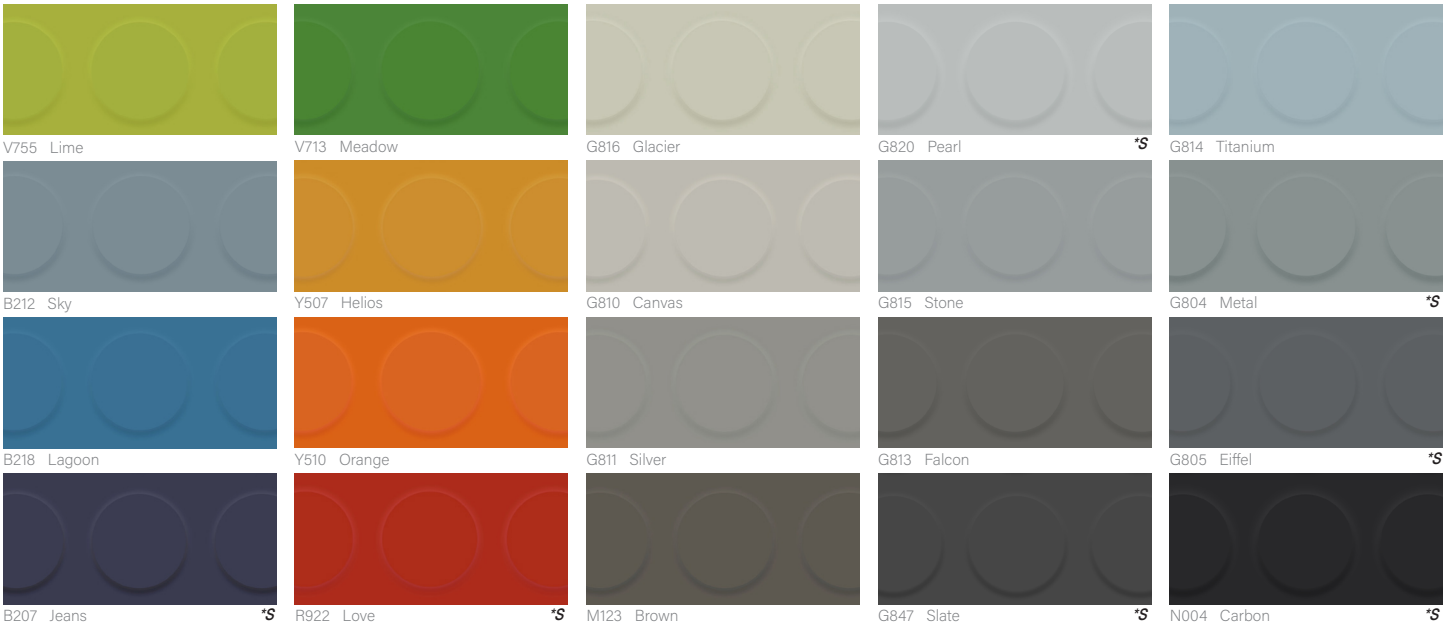

V755 Lime
V713 Meadow
G816 Glacier
G820 Pearl *S
G814 Titanium
B212 Sky
Y507 Helios
G810 Canvas
G815 Stone
G804 Metal *S
B218 Lagoon
Y510 Orange
G811 Silver
G813 Falcon
G805 Eiffel *S
B207 Jeans *S
R922 Love *S
M123 Brown
G847 Slate *S
N004 Carbon *S

DURABILITY

Tested for Abrasion Resistance (ASTM D3389) above industry requirements

Exceptional chemical resistance - ASTM F925

Great static and rolling load resistance

15-year standard limited wear warranty

SAFETY

Excellent Microbial Resistance

Uniform nonporous construction

Great slip resistance - ASTM D2047

Class 1 fire rated - ASTM E648

REDUCED TOTAL COST OF OWNERSHIP (TCO)

Demonstrated long life expectancy

No surface waxing required

Easy to maintain with neutral floor cleaner

COMFORT

Noise absorption qualities for improved acoustics

Impact Sound Transmission Reduction - ASTM E2179

Increased underfoot comfort with anti-fatigue properties

Superior product resiliency

ENVIRONMENTAL STEWARDSHIP

100% recyclable

Made without LBC red listed ingredients

GREENGUARD Gold certified

Pre-consumer recycled content

Cradle to Cradle Certified® Silver

Website

Sustainability Credentials