GRANITO

Premium Contract Rubber Flooring

GRANITO

Smooth rubber surface with multicolor granules.

THICKNESS	WEIGHT	ROLLS	TILES
0.079 in (2 mm)	~0.68 lb/ft² (~3.3 kg/m²)	6 ft 2 in x 45 ft 11 in (1.9 m x 14 m)	24 in x 24 in (61 cm x 61 cm)

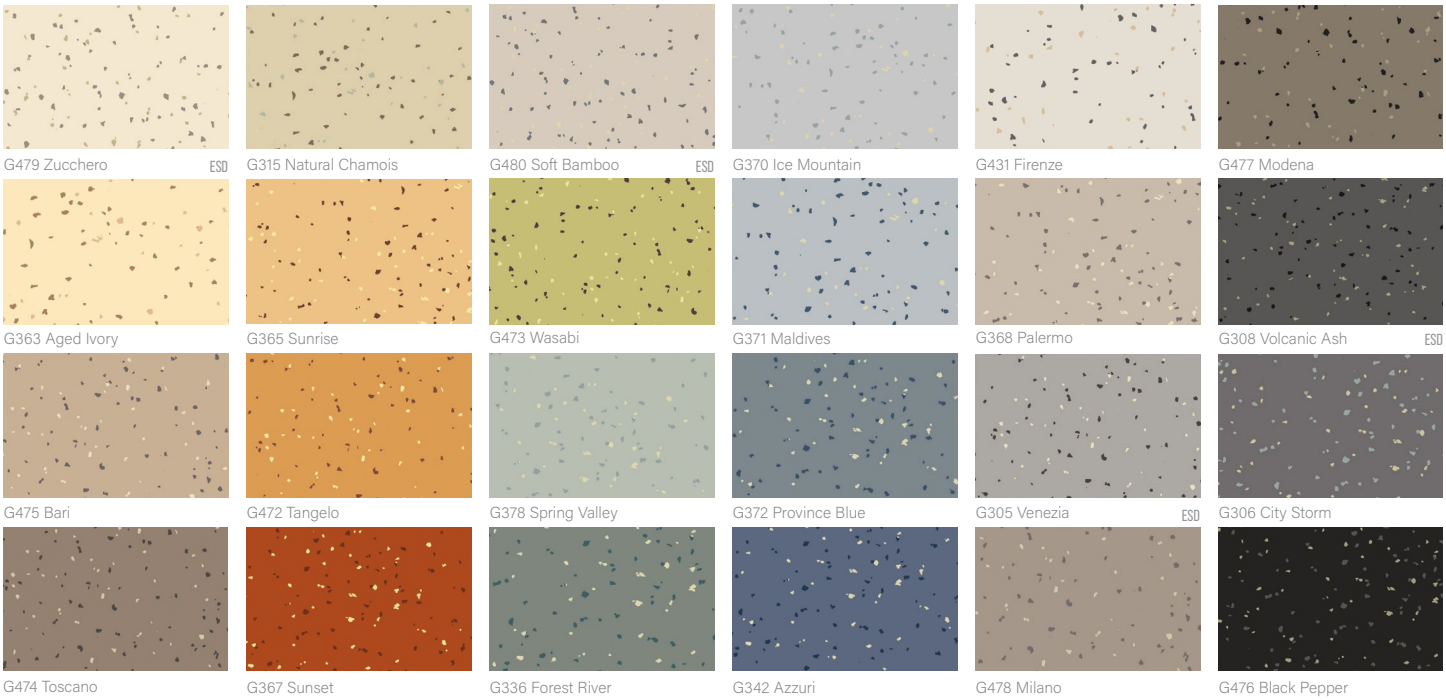

G479 Zucchero ESD | G315 Natural Chamois | G480 Soft Bamboo ESD | G370 Ice Mountain | G431 Firenze | G477 Modena

G363 Aged Ivory | G365 Sunrise | G473 Wasabi | G371 Maldives | G368 Palermo | G308 Volcanic Ash ESD

G475 Bari | G472 Tangelo | G378 Spring Valley | G372 Province Blue | G305 Venezia ESD | G306 City Storm

G474 Toscano | G367 Sunset | G336 Forest River | G342 Azzuri | G478 Milano | G476 Black Pepper

ESD = *Color is available in static dissipative formulation. Consult Granito ANT48 technical documents for specific information.*

DURABILITY

UV-cured Mondoshield surface treatment
Tested for Abrasion Resistance (ASTM D3389) above industry requirements
Exceptional chemical resistance - ASTM F925
Great static and rolling load resistance
15-year standard limited wear warranty

SAFETY

Excellent Microbial Resistance
Uniform nonporous construction
Great slip resistance - ASTM D2047
Class 1 fire rated - ASTM E648

REDUCED TOTAL COST OF OWNERSHIP (TCO)

Demonstrated long life expectancy
No surface waxing required
Easy to maintain with neutral floor cleaner

COMFORT

Noise absorption qualities for improved acoustics
Impact Sound Transmission Reduction - ASTM E2179
Increased underfoot comfort with anti-fatigue properties
Superior product resiliency

ENVIRONMENTAL STEWARDSHIP

Product-Specific Type III EPD
Health Product Declaration (HPD)
100% recyclable
Made without LBC red listed ingredients
GREENGUARD Gold certified
Pre-consumer recycled content
Cradle to Cradle Certified® Silver

Website

Sustainability Credentials