
Premium Rubber Flooring



DHARMA

Smooth rubber surface with micro-granules.

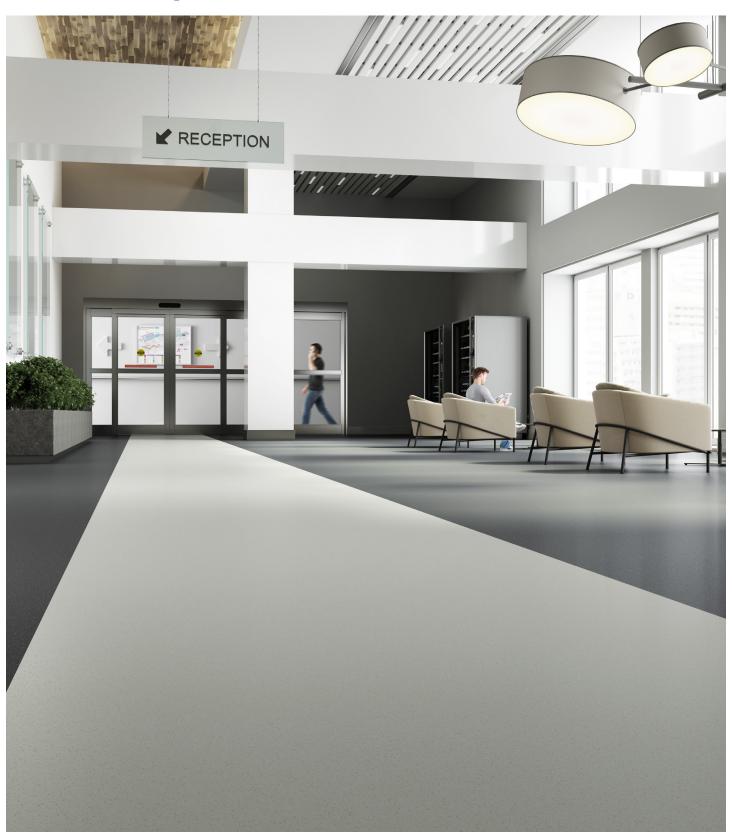

THICKNESS

0.079 in (2 mm)



WEIGHT

~0.63 lb/ft² $(\sim 3.1 \text{ kg/m}^2)$





TILES 24 in x 24 in (61 cm x 61 cm)

DURABILITY

Proven wear abrasion resistance - ASTM D3389 High stain and chemical resistance - ASTM F925 Great static and rolling load resistance 15-year wear warranty

COMFORT

Noise absorption qualities for improved acoustics - ISO 10140-3 Increased underfoot comfort with anti-fatigue properties Superior product resiliency

LIFE-CYCLE COST/EASE OF MAINTENANCE

Low overall cost of ownership from savings on maintenance Demonstrated long life expectancy No waxing required

SAFETY

Excellent fungal, bacterial and microbial resistance throughout Slip resistance - complies with ADA 302 Floor and ground surfaces Class 1 fire rated - ASTM E648

ENVIRONMENTAL STEWARDSHIP

HPD

100% recyclable

Does not contain any LBC red listed ingredient

GREENGUARD Gold certified

Meets CA section 01350















Sustainability Credential



D02 Linen



D10 Moon



D14 Juta



D11 Musk



D12 Vanilla



D15 Almond



D16 Spice



D13 Oak



D18 Saffron



D07 Palladium



D20 Papaya



D08 Air



D19 Pompei



D06 Island



D17 Cedar



D09 Ash



D05 Midnight



D04 Elephant



D01 Onyx



D03 Seal