

# MASSETTO

Premium Rubber Flooring



# MASSETTO

Smooth rubber surface with a painted concrete design.



**THICKNESS**  
0.118 in  
(3 mm)



**ROLLS**  
6 ft 2 in x 32 ft 9 in  
(1.9 m x 10 m)



**TILES**  
24 in x 24 in  
(61 cm x 61 cm)



**WEIGHT**  
~1.00 lb/ft<sup>2</sup>  
(~4.9 kg/m<sup>2</sup>)

## WITH DUAL DUROMETER TECHNOLOGY

MONDO's unique Dual Durometer Technology is a process through which a wear layer is molecularly bound to a bottom performance layer. It increases the durability and performance of the flooring and allows for a long-lasting appearance.

## DURABILITY

UV cured MONDOshield maintenance mitigation system  
Proven wear abrasion resistance - ASTM D3389  
High stain and chemical resistance - ASTM F925  
Great static and rolling load resistance  
15-year wear warranty

## COMFORT

Noise absorption qualities for improved acoustics - ISO 10140-3  
Increased underfoot comfort with anti-fatigue properties  
Superior product resiliency

## LIFE-CYCLE COST/EASE OF MAINTENANCE

Low overall cost of ownership from savings on maintenance  
Demonstrated long life expectancy  
No waxing required

## SAFETY


Excellent fungal, bacterial and microbial resistance throughout  
Slip resistance - complies with ADA 302 Floor and ground surfaces  
Class 1 fire rated - ASTM E648

## ENVIRONMENTAL STEWARDSHIP


HPD  
100% recyclable  
Does not contain any LBC red listed ingredient  
GREENGUARD Gold certified  
Meets CA section 01350  
2% pre-consumer recycled content  
10% rapidly renewable content

Specs

Sustainability Credential

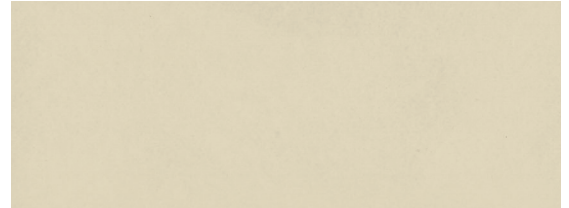

S01 Ivory

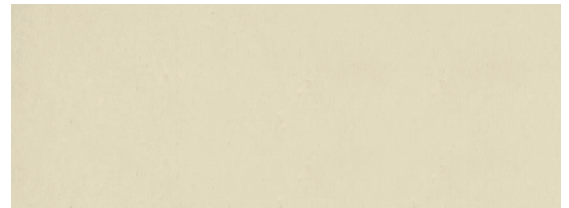


S02 Antique




S03 Greige



S04 Haze

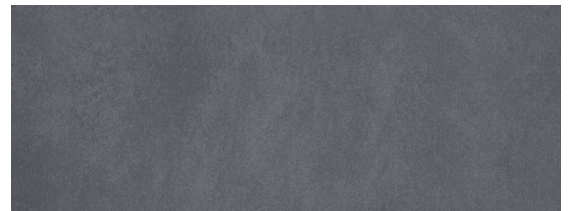

S05 Cement

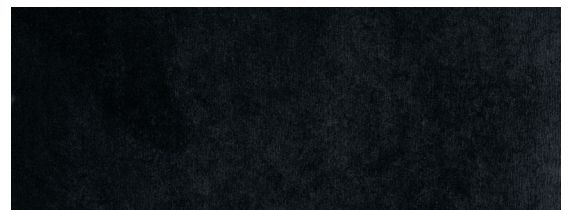

S06 Charcoal