

# HARMONI

Premium Rubber Flooring







HG511 Saffron



HG515 Curcuma

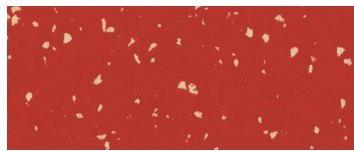


HG519 Paprika

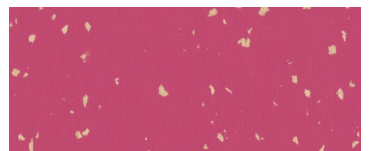

HG523 Pink Peppercorn




HG512 Pistachio

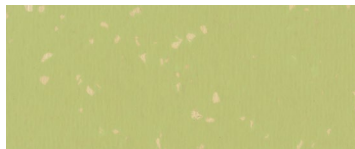


HG516 Honeydew




HG520 Yuzu

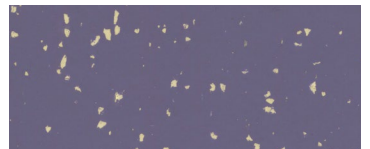

HG524 Passionfruit

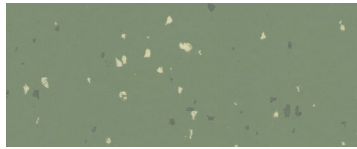


HG510 Dianthus

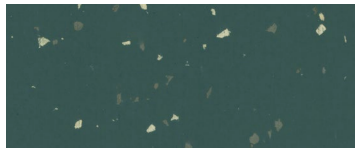


HG514 Eucalyptus




HG518 Eryngium

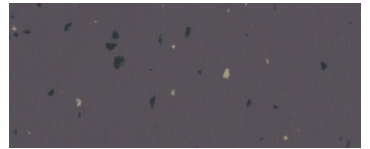


HG522 Wisteria

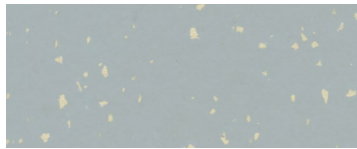


HG513 Glacier

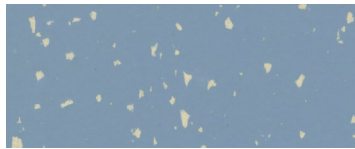


HG517 River

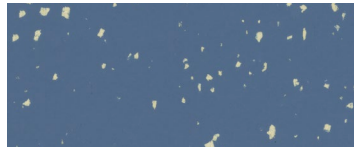


HG521 Sea

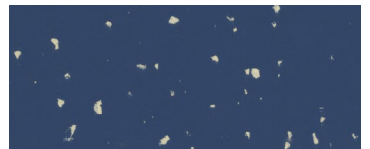


HG525 Ocean

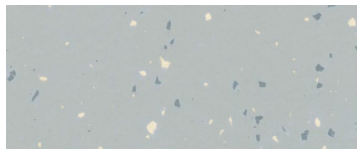


HG509 Blizzard

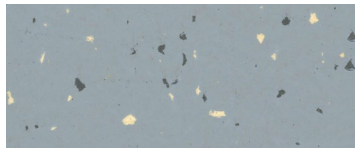


HG505 Hail

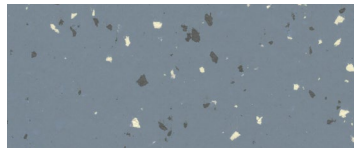

HG501 Rain

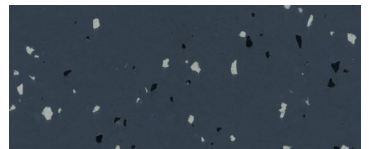


HG497 Storm

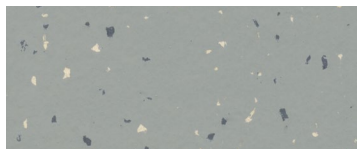


HG508 Elephant




HG504 Dolphin

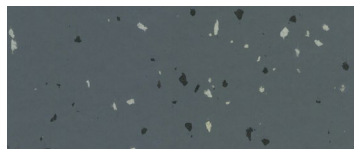


HG500 Whale

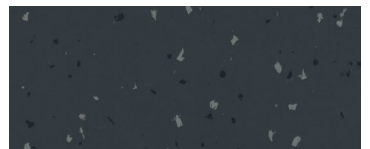


HG496 Shark

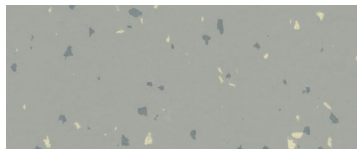


HG507 Nickel

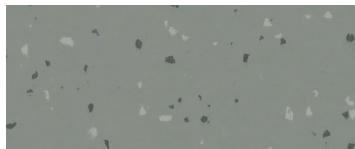

HG503 Alumimium

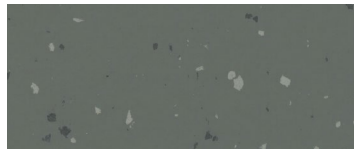


HG499 Iron

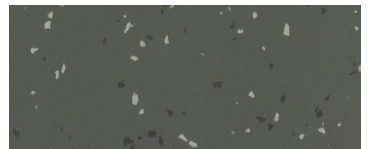


HG495 Titanium




HG506 Sphinx

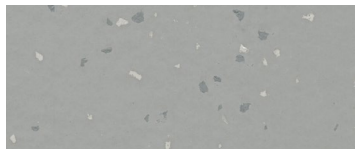


HG502 Greyhound

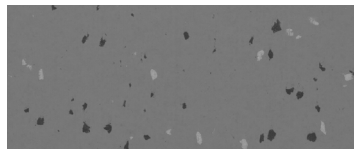


HG498 Korat

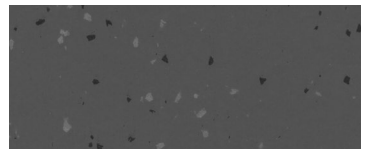


HG494 Weimaraner

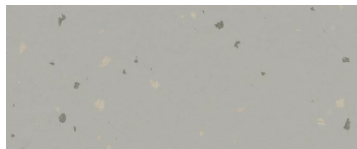


HG493 Sand

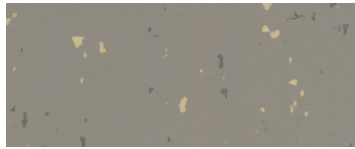

HG487 Silt

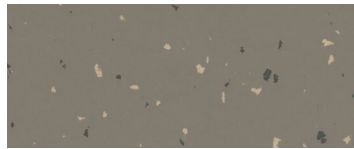


HG484 Peat

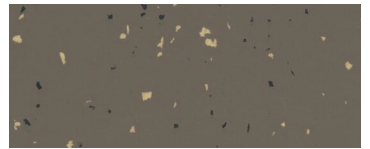

HG488 Loam




HG492 Silk

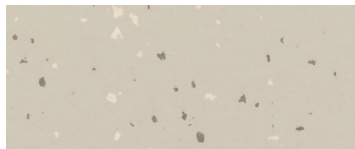

HG486 Wool




HG483 Cotton

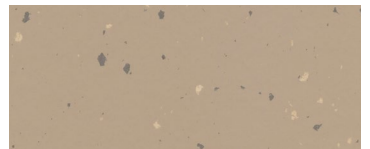


HG489 Jute




HG526 Canvas

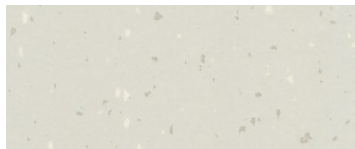

HG485 Palette

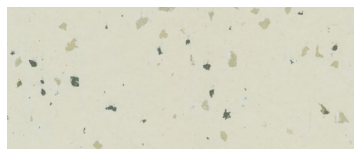

HG481 Vellum

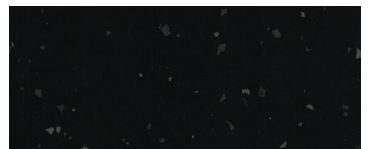

HG490 Ink



Smooth rubber surface with multicolored granules.



**THICKNESS**  
0.118 in  
(3 mm)



**WEIGHT**  
~0.98 lb/ft<sup>2</sup>  
(~4.8 kg/m<sup>2</sup>)



**ROLLS**  
6 ft 2 in x 32 ft 9 in  
(1.9 m x 10 m)



**TILES**  
24 in x 24 in  
(61 cm x 61 cm)

## WITH DUAL DUROMETER TECHNOLOGY

MONDO's unique Dual Durometer Technology is a process through which a wear layer is molecularly bound to a bottom performance layer. It increases the durability and performance of the flooring and allows for a long-lasting appearance.

## DURABILITY

UV cured MONDOshield maintenance mitigation system  
Proven wear abrasion resistance - ASTM D3389  
High stain and chemical resistance - ASTM F925  
Great static and rolling load resistance  
15-year wear warranty

## COMFORT

Noise absorption qualities for improved acoustics - ASTM E2179  
Increased underfoot comfort with anti-fatigue properties  
Superior product resiliency

## LIFE-CYCLE COST/EASE OF MAINTENANCE


Low overall cost of ownership from savings on maintenance  
Demonstrated long life expectancy  
No waxing required

## SAFETY

Excellent fungal, bacterial and microbial resistance throughout  
Slip resistance - complies with ADA 302 Floor and ground surfaces  
Class 1 fire rated - ASTM E648  
Resistance to Fungi - ASTM G21

## ENVIRONMENTAL STEWARDSHIP

EPD and HPD  
100% recyclable  
Does not contain any LBC red listed ingredient  
GREENGUARD Gold certified  
Meets CA section 01350  
Cradle to Cradle Certified® Silver

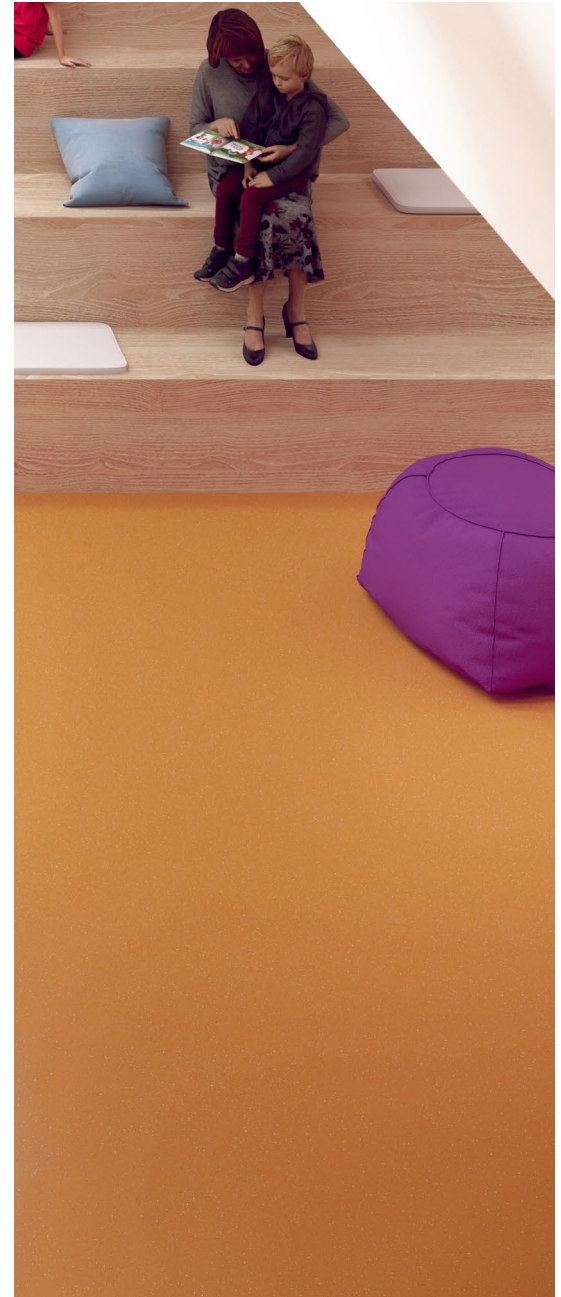

## Specs



## Sustainability credentials