

GRANITO

Premium Contract Rubber Flooring

STATIC DISSIPATIVE



 **MONDO**

GRANITO

Smooth rubber surface with multicolor granules.

STATIC DISSIPATIVE



THICKNESS
0.079 in
(2 mm)




WEIGHT
~0.68 lb/ft²
[~3.3 kg/m²]



ROLLS
6 ft 2 in x 45 ft 11 in
[1.9 m x 14 m]



TILES
24 in x 24 in
(61 cm x 61 cm)

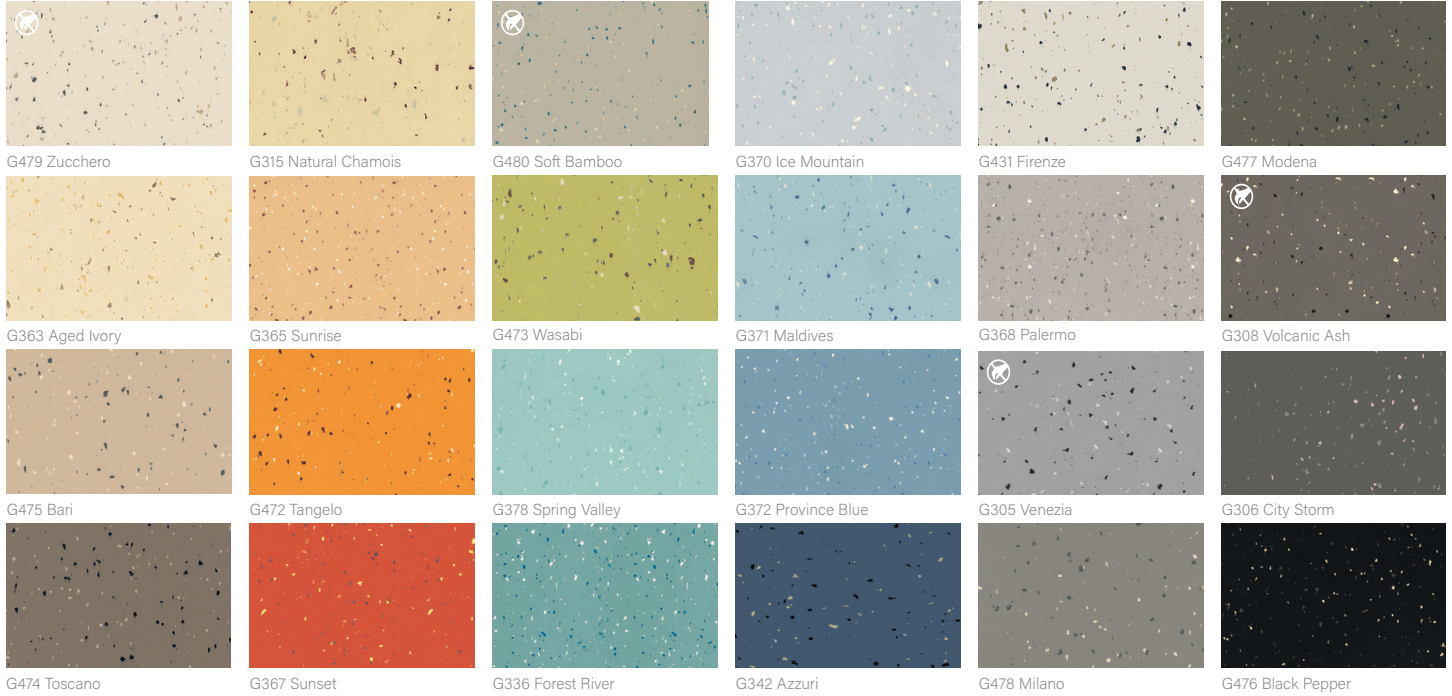

DURABILITY

- UV-cured Mondoshield surface treatment
- Tested for Abrasion Resistance (ASTM D3389) above industry requirements
- Exceptional chemical resistance - ASTM F925
- Great static and rolling load resistance
- 15-year standard limited wear warranty

SAFETY

- Excellent Microbial Resistance
- Uniform nonporous construction
- Great slip resistance - ASTM D2047
- Class 1 fire rated - ASTM E648

REDUCED TOTAL COST OF OWNERSHIP (TCO)

- Demonstrated long life expectancy
- No surface waxing required
- Easy to maintain with neutral floor cleaner

COMFORT

- Noise absorption qualities for improved acoustics
- Impact Sound Transmission Reduction - ASTM E2179
- Increased underfoot comfort with anti-fatigue properties
- Superior product resiliency

ENVIRONMENTAL STEWARDSHIP

- Product-Specific Type III EPD
- Health Product Declaration (HPD)
- 100% recyclable
- Made without LBC red listed ingredients
- GREENGUARD Gold certified
- Pre-consumer recycled content
- Cradle to Cradle Certified® Silver

Website



Sustainability Credentials