
HARMONI

STATIC DISSIPATIVE

Premium Contract Rubber Flooring





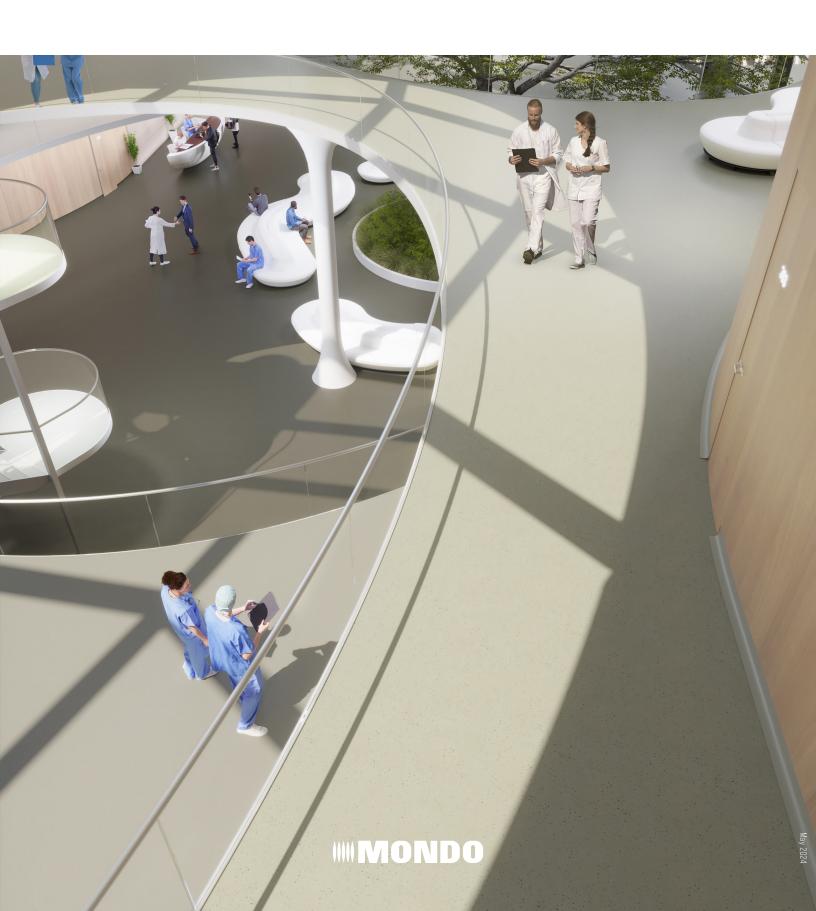

THICKNESS 0.118 in (3 mm)



WEIGHT ~0.98 lb/ft² [~4.8 kg/m²]



ROLLS 6 ft 2 in x 32 ft 9 in (1.9 m x 10 m)



TILES 24 in x 24 in (61 cm x 61 cm



WITH DUAL DUROMETER TECHNOLOGY

Mondo's unique dual durometer technology is a process where the wear layer and performance layer have undergone intermolecular bonding and cannot be separated. The process not only increases the product's overall durability, it enhances performance, including acoustic and comfort benefits.

DURABILITY

UV-cured Mondoshield surface treatment
Tested for Abrasion Resistance (ASTM D3389) above industry requirements
Exceptional chemical resistance - ASTM F925
Great static and rolling load resistance
15-year standard limited wear warranty

SAFETY

Excellent Microbial Resistance Uniform nonporous construction Great slip resistance - ASTM D2047 Class 1 fire rated - ASTM E648

REDUCED TOTAL COST OF OWNERSHIP (TCO)

Demonstrated long life expectancy No surface waxing required Easy to maintain with neutral floor cleaner

COMFORT

Noise absorption qualities for improved acoustics Impact Sound Transmission Reduction - ASTM E2179 Increased underfoot comfort with anti-fatigue properties Superior product resiliency

ENVIRONMENTAL STEWARDSHIP

Product-Specific Type III EPD
Health Product Declaration (HPD)
100% recyclable
Made without LBC red listed ingredients
GREENGUARD Gold certified
Pre-consumer recycled content
Cradle to Cradle Certified® Silver

Sustainability Credentials

























