

MASSETTO

Premium Contract Rubber Flooring



 **MONDO**

MASSETTO

Smooth rubber surface with a concrete design.



THICKNESS
0.118 in
(3 mm)




WEIGHT
~1.00 lb/ft²
[~4.9 kg/m²]




ROLLS
6 ft 2 in x 32 ft 9 in
[1.9 m x 10 m]




TILES
24 in x 24 in
[61 cm x 61 cm]

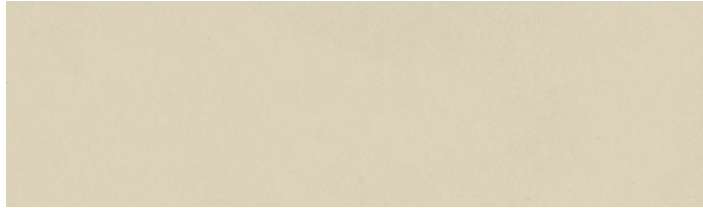

S01 Ivory

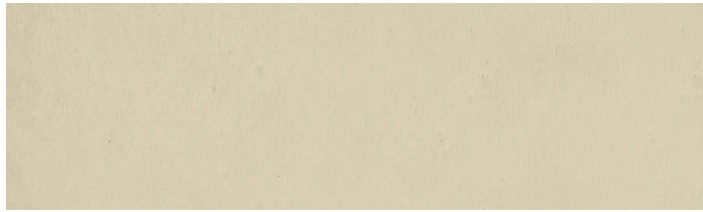

S02 Antique

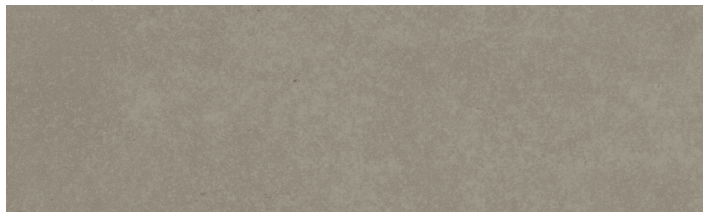

S03 Greige



S04 Haze



S05 Cement



S06 Charcoal

WITH DUAL DUROMETER TECHNOLOGY

Mondo's unique dual durometer technology is a process where the wear layer and performance layer have undergone intermolecular bonding and cannot be separated. The process not only increases the product's overall durability, it enhances performance, including acoustic and comfort benefits.

DURABILITY

- UV-cured Mondoshield surface treatment
- Tested for Abrasion Resistance (ASTM D3389) above industry requirements
- Exceptional chemical resistance - ASTM F925
- Great static and rolling load resistance
- 15-year standard limited wear warranty

SAFETY

- Excellent Microbial Resistance
- Uniform nonporous construction
- Great slip resistance - ASTM D2047
- Class 1 fire rated - ASTM E648

REDUCED TOTAL COST OF OWNERSHIP (TCO)

- Demonstrated long life expectancy
- No surface waxing required
- Easy to maintain with neutral floor cleaner

COMFORT

- Noise absorption qualities for improved acoustics
- Impact Sound Transmission Reduction - ASTM E2179
- Increased underfoot comfort with anti-fatigue properties
- Superior product resiliency

ENVIRONMENTAL STEWARDSHIP

- Product-Specific Type III EPD
- Health Product Declaration (HPD)
- 100% recyclable
- Made without LBC red listed ingredients
- GREENGUARD Gold certified
- Pre-consumer recycled content
- Cradle to Cradle Certified® Silver

Website



Sustainability Credentials