


MONDOSTEP STAIR SOLUTIONS

RUBBER FLOORING FOR CONTEMPORARY ARCHITECTURE

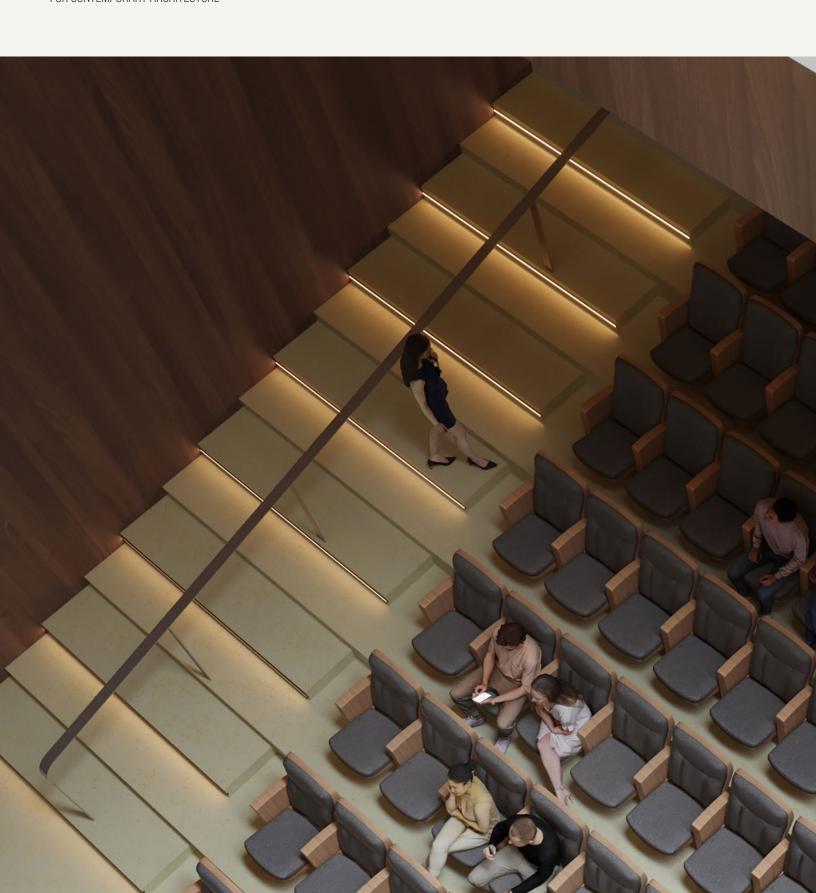


# **MONDOSTEP**

2 distinctive stair solutions

# MONDOSTEP-S

Standard Rubber Stair Tread & Riser


- · Complete tread and riser combination
- · Adjusts to variable riser heights 9.5"-13"
- · Quick and easy installation
- · Matching landing tile available
- 10 year wear warranty

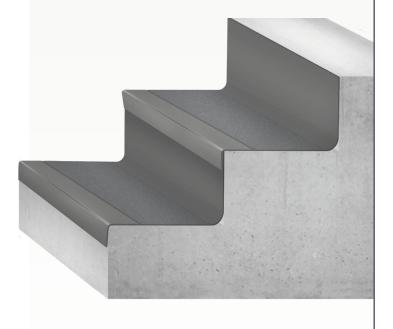

# MONDOSTEP-P

Premium Aluminum Stair Nosing Profiles

- · Modern sleek design solutions
- · Harmonizes stair and field design
- Unparalleled durability
- Ease of maintenance
- · Maximum protection for the stair nosing
- 15 year wear warranty

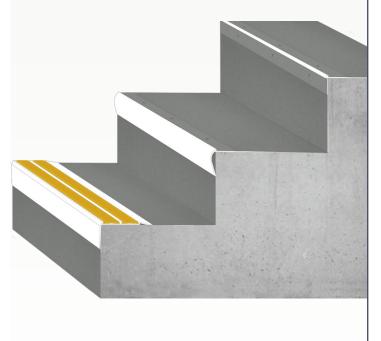

### MONDOSTEP-P

#### Premium aluminum stair nosing

Mondostep-P is our aluminum stair nosing line, a premium designorientated solution that will integrate our premium rubber products into stairs and landing area applications. This allows for seamless transitions from flooring to stairs.

Given the precision cut aluminum construction, the solution improves the overall quality and durability of every installation by protecting the concrete nosing, the weakest part of the stair construction and the area most affected by heavy traffic. Mondostep-P works seamlessly with any of our flooring in sheets or tiles.

Mondostep-P has 3 profiles in various heights and styles to accommodate the vast majority of Mondo's product lines and your facility's needs.



#### INSTALLATION

The profiles are to be attached to the stair through the use of adhesive and screws within beveled holes in aluminum stair nose.

#### STAIR NOSING COLORS

All Mondo Premium nosing is sold in minimum of 1 piece of 2.5 m (8 ft. 2 in.)



#### VI PVC STRIP COLORS FOR P3VI

All Mondo VI strips are sold separately, in minimum of 82 ft.





# MONDOSTEP P

### Premium aluminum stair nosing



A sleek design where the corner of the aluminum is visible, allowing for a continuous flow from the landing to the stairs.






DEPTH	LENGTH	WIDTH	HEIGHT (Visible section)	COLORS
2.5 mm (0.098 in.)	2.50 m (8 ft. 2 in.)	39 mm (1.535 in.)	3.97 mm (0.156 in.)	Silver only
3 mm (0.118 in.)			4.2 mm (0.165 in.)	Silver, Sand, Bronze
4 mm (0.157 in.)		42 mm (1.654 in.)	5.3 mm (0.219 in.)	

Installation: Countersunk drilled. Suggested screw: Phillips No. 4, length 1 in.



A bull-nosed aluminum profile visible at the front top of each stair for added durability and a polished look.





DEPTH	LENGTH	WIDTH	HEIGHT (Visible section)	COLORS
3 mm (0.118 in.)	0.50 (0.61 0.73)	40 (4.00 )	40 (4.075 )	011 0 1 0
4 mm (0.157 in.)	2.50 m (8 ft. 2 in.)	48 mm (1.89 in.)	48 mm (1.875 in.)	Silver, Sand, Bronze

Installation: Countersunk drilled. Suggested screw: Phillips No. 4, length 1 in.



A heavy-duty safety stair edge, this aluminum nosing is designed to add slip-resistant, VI inserts.



	}	WIDTH	
1			
HEIGHT	1		
HEIUH I	l		
	1		

AVAILABLE FOR	LENGTH	WIDTH	HEIGHT (Visible section)	COLORS
2-4 mm flooring (0.079 in0.157 in.)	2.50 m (8 ft. 2 in.)	67 mm (2.638 in.)	40 mm (1.811 in.)	Silver, Sand, Bronze

 ${\it Installation: Countersunk\ drilled.\ Suggested\ screw:\ Phillips\ No.\ 6,\ length\ 1\quad 3/16\ in.}$ 

\*Insert available in rolls of 25 m (82 ft



# **MONDOSTEP S**

Standard Rubber Stair Tread



Mondostep-S can be installed with matching landing tiles or with Mondo premium rubber flooring. It is available in a thickness of 7 mm (0.276 in) at tread and 3.2 mm (0.126 in.) at transition and is available in lengths of either 4 ft or 6 ft.


Mondostep-S rubber stair tread and riser provides a clean and simple design solution. The stairtread comes in five neutral colors along with classic black and can be ordered with a range of contrasting color abrasive strips as required. Mondo's stair tread stocking program, available for select colors, will allow for last minute projects. A tried and true workhorse accessory that will not disappoint.

Mondostep S is Floorscore certified.




#### INSTALLATION

The stair tread is installed on the stair structure with approved Mondo adhesive or adhesive tape throughout.



Its one-piece construction is quick and easy to install and will adjust to variable riser heights.



SIZES	THICKNESS	ANGLE (Installed)	WEIGHT	COLORS
4 ft x 13 in (1.22 m x 0.33 m)	0.275 in (7 mm) at tread	90°	4 ft: 9lb (4.08 kg)/piece	Stone, Coffee, Black, Ebony, Silver, Steel
6 ft x 13 in (1.83 m x 0.33 m)	0.126 in (3.2 mm) at transition		6 ft: 14lb (6.35 kg)/piece	

# **MONDOSTEP S**

Standard Rubber Stair Tread


### **STAIR TREAD COLORS**

Other available on request (custom orders available; minimum quantity required)



#### **LANDING TILES**

18" x 18" - colors matching stair tread  $\,$   $\,$  Thickness 3.2 mm / 0.126 in

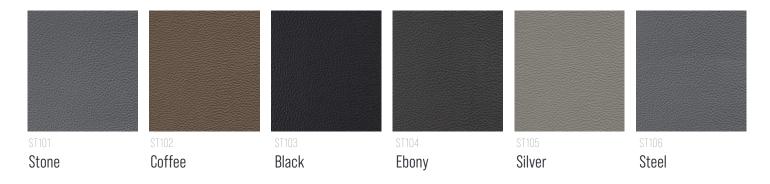

#### VI ABRASIVE PAPER STRIPS

Take proactive steps to make your stairs safer with VI strip inserts. For enhanced safety and compliance with local or national regulations, the 2" abrasive strips are available for our stair tread options and come pre-assembled for a streamlined installation.

Other available on request (custom orders available; minimum quantity required)







Don't compromise on safety and style. Ready to transform your stairs with the perfect solution?

<u>Contact us</u> for information or to request samples today or visit our <u>website</u> to learn more.