







BOLLO CLASSIC/STRONG


Premium Contract Rubber Flooring



 **MONDO**

BOLLO CLASSIC/STRONG Studded surface in a solid color.

CLASSIC	 THICKNESS 0.106 in (2.7mm)	 WEIGHT ~0.76 lbs/ft ² [~3.7 kg/m ²]	 TILES 19 11/16 in x 19 11/16 in (50 cm x 50 cm)	STUD DIMENSIONS 1.10 in. [28 mm] x 0.02 in. [0.5 mm]
STRONG* <small>*Colors with *S</small>	 THICKNESS 0.157 in (4mm)	 WEIGHT ~1.10 lbs/ft ² [~5.4 kg/m ²]	 TILES 39 3/8 in x 39 3/8 in (100 cm x 100 cm)	

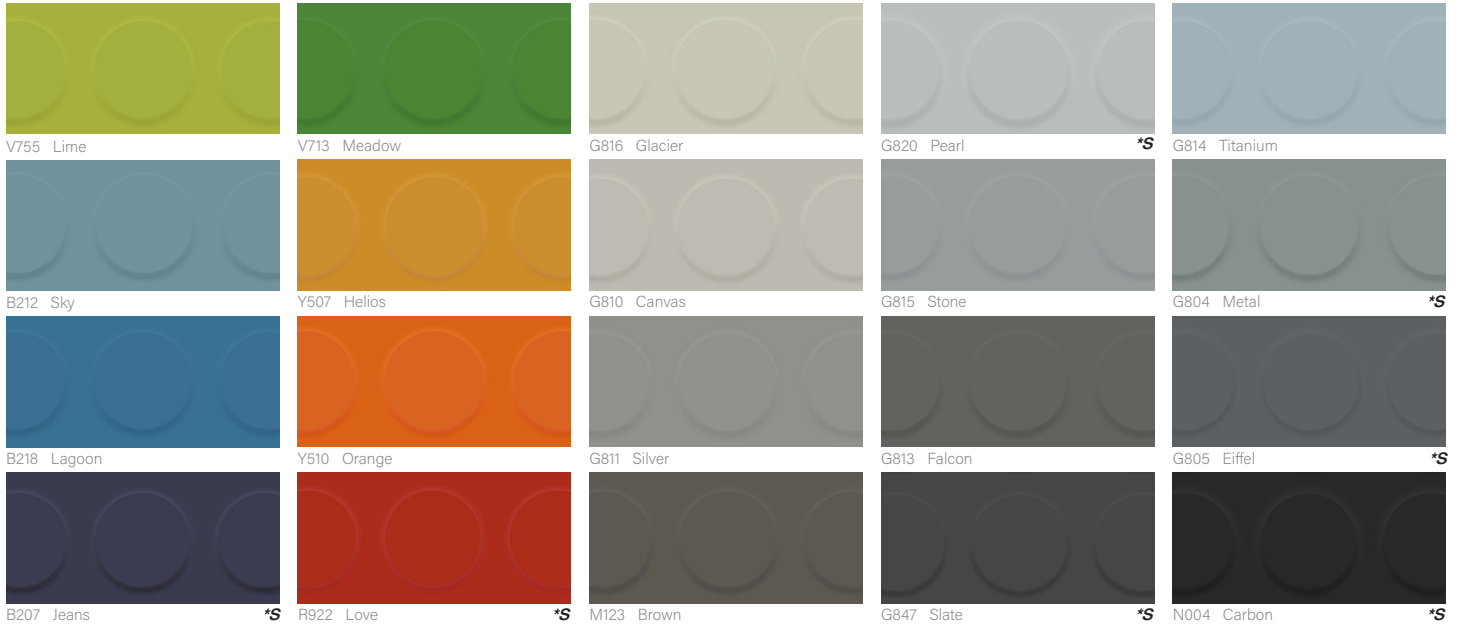

DURABILITY

- Tested for Abrasion Resistance (ASTM D3389) above industry requirements
- Exceptional chemical resistance - ASTM F925
- Great static and rolling load resistance
- 15-year standard limited wear warranty

SAFETY

- Excellent Microbial Resistance
- Uniform nonporous construction
- Great slip resistance - ASTM D2047
- Class 1 fire rated - ASTM E648

REDUCED TOTAL COST OF OWNERSHIP (TCO)

- Demonstrated long life expectancy
- No surface waxing required
- Easy to maintain with neutral floor cleaner

COMFORT

- Noise absorption qualities for improved acoustics
- Impact Sound Transmission Reduction - ASTM E2179
- Increased underfoot comfort with anti-fatigue properties
- Superior product resiliency

ENVIRONMENTAL STEWARDSHIP

- Product-Specific Type III EPD
- Health Product Declaration (HPD)
- 100% recyclable
- Made without LBC red listed ingredients
- GREENGUARD Gold certified
- Pre-consumer recycled content
- Cradle to Cradle Certified® Silver

Website



Sustainability Credentials